



(11) **EP 1 152 642 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.11.2001 Bulletin 2001/45

(51) Int Cl.7: **H05B 33/08**

(21) Application number: **01109868.8**

(22) Date of filing: **23.04.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
 Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Nishimura, Ken A.**
Fremont, CA 94555-2964 (US)

(74) Representative: **Liesegang, Eva**
Forrester & Boehmert,
Pettenkoferstrasse 20-22
80336 München (DE)

(30) Priority: **27.04.2000 US 560718**

(71) Applicant: **Agilent Technologies, Inc. (a Delaware corporation)**
Palo Alto, CA 94303 (US)



(54) **Method and apparatus for measuring spectral content of LED light source and control thereof**

(57) Solid state illumination using closed loop spectral control. Light emitting diodes producing different colors (110, 120, 130) are mounted in close proximity to

photosensors (150). Spectral content of the light emitting diodes is measured by the photosensors (150), and these measurements used to adjust light emitting diode currents to achieve the desired spectral characteristics.

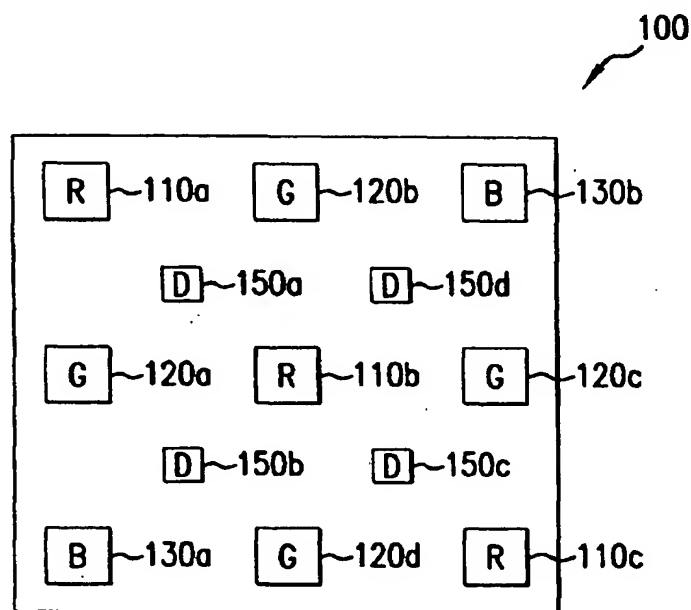


FIG. 1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention pertains to the field of solid state illumination, and more particularly to solid state illumination systems employing closed loop control to maintain spectral characteristics.

Art Background

[0002] High brightness Light Emitting Diodes (LEDs) have sparked interest in their use for illumination. LEDs have no moving parts, operate at low temperatures, and exceed the reliability and life expectancy of common incandescent light bulbs by at least an order of magnitude. The main drawback in implementing LED based light sources for general illumination purposes is the lack of a convenient white-light source. Unlike incandescent light sources which are broadband black-body radiators, LEDs produce light of relatively narrow spectra, governed by the bandgap of the semiconductor material used to fabricate the device. One way of making a white light source using LEDs combines red, green, and blue LEDs to produce white, much in the same way white light is produced on the screen of a color television.

[0003] Combining light from blue, red, and green LEDs of appropriate brightness yields a "white" light. The brightness of each LED is controlled by varying the amount of current passing through it. Slight differences in the relative amounts of each color manifests itself as a color shift in the light, akin to a shift in the color temperature of an incandescent light source by changing the operating temperature. Use of LEDs to replace existing light sources requires that the color temperature of the light be controlled and constant over the lifetime of the unit.

[0004] Some applications require more careful control of spectral content than others, and differing color temperatures may be desired for different applications. For example, spectral control is of extreme interest in applications such as lighting of cosmetics counters, and food outlets, while spectral control may not be critical in industrial lighting applications where reliability is more important.

[0005] There are two effects which make careful control of spectral content difficult. First is that the luminous efficiency of a given LED will not exactly match that of another LED manufactured by a nominally identical process. The second is that the luminous efficiency of a given LED, and its spectral content, may shift over the lifetime of the device.

[0006] The first problem may be addressed by testing, grading, and matching devices during manufacture. This testing is expensive, and does not address changes occurring with device aging.

[0007] What is needed is a method of automatically measuring the spectral content of a LED light source, and controlling the spectral content based on that measurement.

SUMMARY OF THE INVENTION

[0008] Spectral content of a solid state illumination source composed of Light Emitting Diode (LED) sources of different colors is measured by photosensors mounted in close proximity to the sources. The results of these measurements are used to control the spectral content by varying the current to the different color LEDs.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The present invention is described with respect to particular exemplary embodiments thereof and reference is made to the drawings in which:

Fig. 1 shows the layout of a solid state illumination device according to the present invention,

Fig. 2 shows the block diagram of an embodiment for the control circuit,

Fig. 3 shows the block diagram of an additional embodiment for the control circuit, and

Fig. 4 shows a simple switching converter.

DETAILED DESCRIPTION

[0010] Fig. 1 shows the layout of a solid state illumination device according to the present invention. While mounting LEDs and photosensors on the same substrate may increase manufacturing efficiency, such co-mounting is not necessary to practice the instant invention. Common substrate 100 holds light emitting diodes of different colors, and sensors for sensing emitted light. In this embodiment photodiodes are preferred, although any electrical device which produces a predictable varying electrical response to illumination may be used. In Fig. 1, LEDs of three colors, red (110a, 110b, 110c) green (120a, 120b, 120c, 120d) and blue (130a, 130b) are mounted on the substrate, along with photosensors 150a, 150b, 150c, and 150d. Photosensors 150 are interspersed between LED chips 110, 120, 130 to collect "averaged" light. Incident light on photosensors 150 is mainly via scattering, and is relatively well mixed. Any layout which allows for the photosensors to collect incident light from the LEDs is acceptable.

[0011] A common substrate may also be used to provide interconnections between the devices and control circuitry. In mounting the devices on the substrate, the substrate may be used to provide a common terminal (anode or cathode) with the devices mounted thereupon. It may be advantageous to use the substrate as a com-

mon terminal so as to reduce the number of connections. In some circumstances it may be advantageous to separate out the connections between LEDs 110, 120, 130 and photosensors 150, so that the relatively large currents flowing through LEDs 110, 120, 130 do not interfere with the ability to measure the relatively small currents from photosensors 150.

[0012] The number and arrangement of LED chips and sensor chips is determined to a great extent by the light output of the LEDs, and the light output needed. Given efficient and powerful enough LEDs, only one of each color would be needed. The photosensors are interspersed among the LED chips to collect averaged light.

[0013] When photodiodes are used as photosensors 150, as in the preferred embodiment, they may be collected in parallel allowing automatic summation of the signals from each photodiode.

[0014] In operation, a desired spectral content is selected. This may be done in terms of equivalent color temperature. The spectral content of the operating set of LEDs is measured, and adjusted to match the desired levels.

[0015] In a first method of measuring spectral content, a calibration cycle is used in which the light flux of each LED color is measured and adjusted. In this method, photosensors 150 have useful and known response over the spectral range required. Each color of LED is illuminated independently for a brief period of time. The light output is measured by photosensors 150, compared to the desired level, and the current flowing through the selected LED adjusted accordingly. This method may be implemented using a single photosensor positioned so as to collect incident light from the LEDs.

[0016] In the second, preferred method, uses color filters over photosensors 150. In this embodiment, a first pair of sensors, for example photosensors 150a and 150c, are covered with color filters which preferentially pass the shorter wavelengths, green through blue. Photosensors 150b and 150d are covered with color filters preferentially passing the longer wavelengths, green through red. Note that in this scheme, the passbands of each of the filters includes the green component. Alternatively, a separate channel with a green filter could be used. Note that when photosensors incorporating color filters are used, only those photosensors with similar filters are connected in parallel. In the example embodiment given, photosensors 150a and 150c would be connected in parallel, and photosensors 150b and 150d would be connected in parallel. In the embodiment using two channels, the proper color temperature is indicated by a set ratio between the outputs of the short and long wavelength sensors. The drive currents to the LEDs are adjusted to achieve the desired ratio. The overall device intensity is controlled by adjusting LED currents so that the sum of the signals from the short and long wavelength sensors equals a desired val-

ue.

[0017] The control circuit for the LED-sensor array may be a separate integrated circuit or circuits, and may be integrated onto the same substrate, or placed in separate packages.

[0018] In the preferred embodiment, the control circuit consists of integrators connected to each set of photodiodes; in this case, an integrator for the short wavelength sensors, and an integrator for the long wavelength sensors. These integrators convert photodiode current into a voltage representing the amount of light in that part of the spectrum. The voltage output of each integrator is fed to a window comparator. The purpose of the window comparator is to compare the input signal to a reference, and produce outputs when the input signal differs from reference by more than a specified amount of hysteresis. The reference is provided by an additional digital to analog converter (DAC). The gated outputs of the comparators are fed to up/down counters, which drive digital to analog converters. The digital to analog converters in turn control drivers for the LEDs.

[0019] This is shown in simplified form in Fig. 2. Common circuitry such as initialization, gating, and clocking is not shown. Examining the red channel, photodiodes 150b,d of Fig. 1 feeds op amp 210 which uses capacitor 220 to form an integrator. The output of the integrator, a voltage representing the amount of light flux from filtered photodiodes 150b,d, feeds comparators 230 and 240. The output of comparator 230 will be high if the output of integrator 210 is below reference voltage VR 250, the desired red level. Similarly, the output of comparator 240 will be high if the output of integrator 210 is higher than reference voltage VR+ΔR 260. Reference levels VR 250 and VR+ΔR 260 are provided by an additional digital to analog converter, not shown. The outputs of comparators 230 and 240 feed up/down counter 270. The output of counter 270 feeds digital to analog converter (DAC) 280, which feeds driver 290, controlling the intensity of red LED 110. While a field effect transistor (FET) is shown for driver 290, bipolar transistors may also be used.

[0020] When the desired red light flux is below the desired level set by reference VR 250, the output of comparator 230 will be high. Counter 270 counts up, increasing the value feeding DAC 280, increasing the voltage on the gate of driver 290, and increasing the brightness of LED 110.

[0021] Similarly, if the desired red light flux is above the desired level set by reference VR+ΔR 260, the output of comparator 240 is high, causing counter 270 to count down. This decreases the value sent to DAC 280, decreasing the voltage on the gate of driver 290, and decreasing the brightness of LED 110.

[0022] The difference between reference voltages VR 250 and VR+ΔR 260 provides hysteresis in the operation of LED 110. Its output will not be adjusted if it is within the window set by these two reference levels.

[0023] In the embodiment described, the output of

green LEDs 120 is not tracked, but instead is set by DAC 380 which feeds driver 390, controlling green LEDs 120. The overall intensity of the device is controlled through setting the green level, since the output of the red and blue LEDs will track in a ratiometric manner.

[0024] The blue channel operates in a manner similar to the red channel previously described. Red photodiodes 150a,c feed integrator 410. Integrator 410 feeds window comparators 430 and 440, which compare the output voltage of integrator 410 representing the blue light flux to reference levels VB 450 and VB+ΔB 460. The outputs of comparators 430 and 440 control up/down counter 470, which feeds DAC 480 and driver 490 to control blue LEDs 130.

[0025] By performing intensity measurements and adjustments over several measure-integrate-compare-correct cycles, changes are made in a gradual manner.

[0026] In this design, state information is held in the values of counters 270, 370, 470. For more efficient start-up, control circuitry would preserve the values of these counters across power cycles, restoring the counters to their last operating values as a good first approximation of starting levels.

[0027] The embodiment of Fig. 2 uses linear control to vary the intensity of the LEDs. DACs 280, 380, and 480 generate analog levels feeding drivers 290, 390, and 490, controlling the intensity of LEDs 110, 120, and 130. Essentially, drivers 290, 390, and 490 are being used as variable resistors. This type of arrangement is inefficient, as the voltage dropped across drivers 290, 390, and 490 is turned into heat.

[0028] More efficient control is obtained by using switching converters to drive the LEDs. Switching converters are well known in the art, being manufactured by companies such as Texas Instruments and Maxim Integrated Circuits. As is known to the art, in a switching converter, varying pulse width or duty cycle is used to control a switch, producing an adjustable output voltage with very high efficiency. LEDs exhibit relatively high series resistance, so stable control of current is attainable by adjusting the voltage applied to the LED.

[0029] The embodiment of Fig. 2 is adapted to use switching converters by using the outputs of the window comparators (230 and 240 for the red channel, 430 and 440 for the blue channel) to control the pulse widths for switching converters driving the LEDs. When a desired level is too low, the corresponding pulse width is increased, increasing the on time of the switching converter, increasing its output voltage, and increasing the corresponding LED current and luminous output. The values of counters 270, 370, 470 may be used to determine pulse width for the switching converters.

[0030] An additional embodiment illustrating these concepts is shown in Fig. 3. Sequencer 300 controls the operation of the device. Multiplexer 310 under control of sequencer 300 selects the output of one of the photodiodes 150b,d or 150a,c. The output of the selected photodiode is converted to digital form by ADC 320.

[0031] Digital reference levels are provided by latches 410 for the red channel, 510 for the green channel, and 610 for the blue channel. The contents of these latches is loaded and updated by circuitry not shown. For the green channel, the output of latch 510 is used to set the pulse width of pulse width modulator 530, producing a pulse width modulated output 540, which is used to drive switching converter 550 to drive the green LEDs 120.

[0032] Comparators 420 and 620 compare the output of ADC 320 to reference values 410 and 610, respectively. The results of these comparisons, under control of sequencer 300, are fed to pulse width modulators 430 and 630, for the red and blue channels.

[0033] In operation, this embodiment performs much the same as its analog counterpart of Fig. 2. Differences between measured values (320) and desired values (410, 610) are produced by comparators (420, 620) and increase or decrease the pulse width (430, 630) of the corresponding drive signals (440, 640), driving switching converters (450, 650) and LEDs (110, 130).

[0034] This embodiment has the advantage over the embodiment of Fig. 2 in that it is completely digital after the initial ADC stage 320. The digital portion of Fig. 3 may be implemented in fixed logic, or in a single-chip microprocessor.

[0035] Fig. 4 shows a simple switching converter, here a step-down converter for use when the LED supply voltage (Vled) is higher than the voltage applied to the LEDs. Other topologies known to the art may be used to provide a boosted LED voltage if needed by the particular implementation without deviating from the spirit of the current invention. Pulse width modulated drive signal 440 drives the gate of MOS switch 200. When switch 200 is turned on, voltage is applied across inductor 220, causing current to flow through the inductor. When switch 200 is turned off, current continues to flow in inductor 220, with the circuit completed by catch diode 210, preferably a Schottky diode. The voltage across LED 110 is smoothed by capacitor 230. The voltage across LED 110 is proportional to the on-time of switch 200, and therefore the pulse width of drive signal 440.

[0036] The foregoing detailed description of the present invention is provided for the purpose of illustration and is not intended to be exhaustive or to limit the invention to the precise embodiments disclosed. Accordingly the scope of the present invention is defined by the appended claims.

Claims

1. A solid state illumination device (100) for producing a predetermined spectral distribution comprising:
 - a plurality of light emitting diodes (110, 120, 130) of different colors,
 - a photosensor (150) measuring incident light

from the light emitting diodes,
the light emitting diodes and photosensor con-
nected to a control circuit comprising:

a plurality of driver means (290, 390, 490, 5
450, 550, 650), each driver means driving
one or more light emitting diodes of a pre-
determined color,
comparison means (230, 240, 430, 440,
420, 630) for comparing the output of the 10
photosensor with the predetermined spec-
tral distribution, and,
adjustment means (270, 470) coupled to
the comparison means for adjusting the
driver means such that the output of the 15
photosensor matches the predetermined
spectral distribution.

2. The illumination device of Claim 1 where the pho-
tosensor (150) is mounted interspersed among the 20
light emitting diodes (110, 120, 130) so as to meas-
ure incident light from the light emitting diodes.
3. The illumination device of Claim 1 or 2 where the
photosensor (150) is a photodiode. 25
4. The illumination device of Claim 1, 2 or 3 where the
driver means (290, 390, 490) is a linear driver.
5. The illumination device of Claim 1, 2 or 3 where the 30
driver means (450, 550, 650) is a switching convert-
er.
6. The illumination device of one of the preceding
claims where the photosensor (150) responds to 35
the light emitted by each of the different color LEDs
(110, 120, 130).
7. The illumination device of one of the preceding
claims where the photosensor (150) and the light 40
emitting diodes (110, 120, 130) are mounted on a
common substrate.

45

50

55

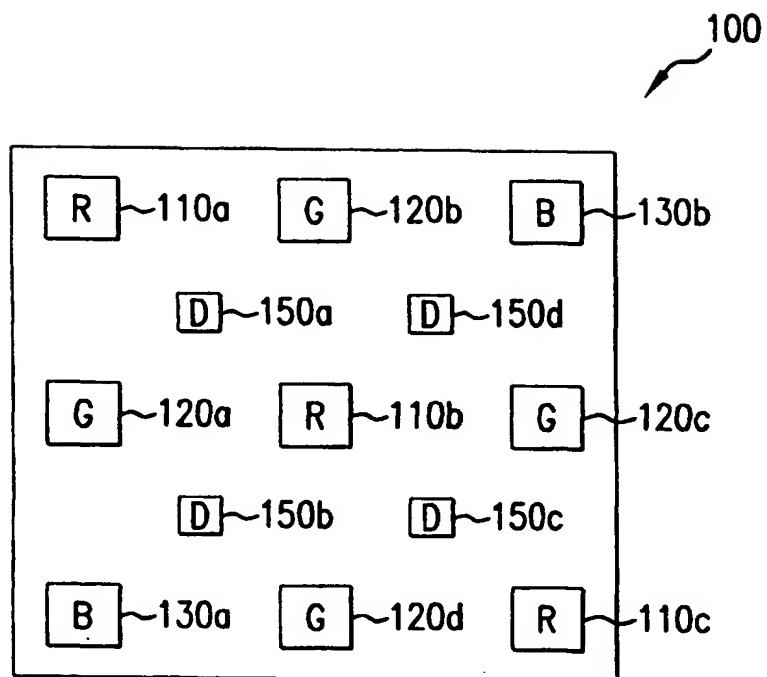


FIG.1

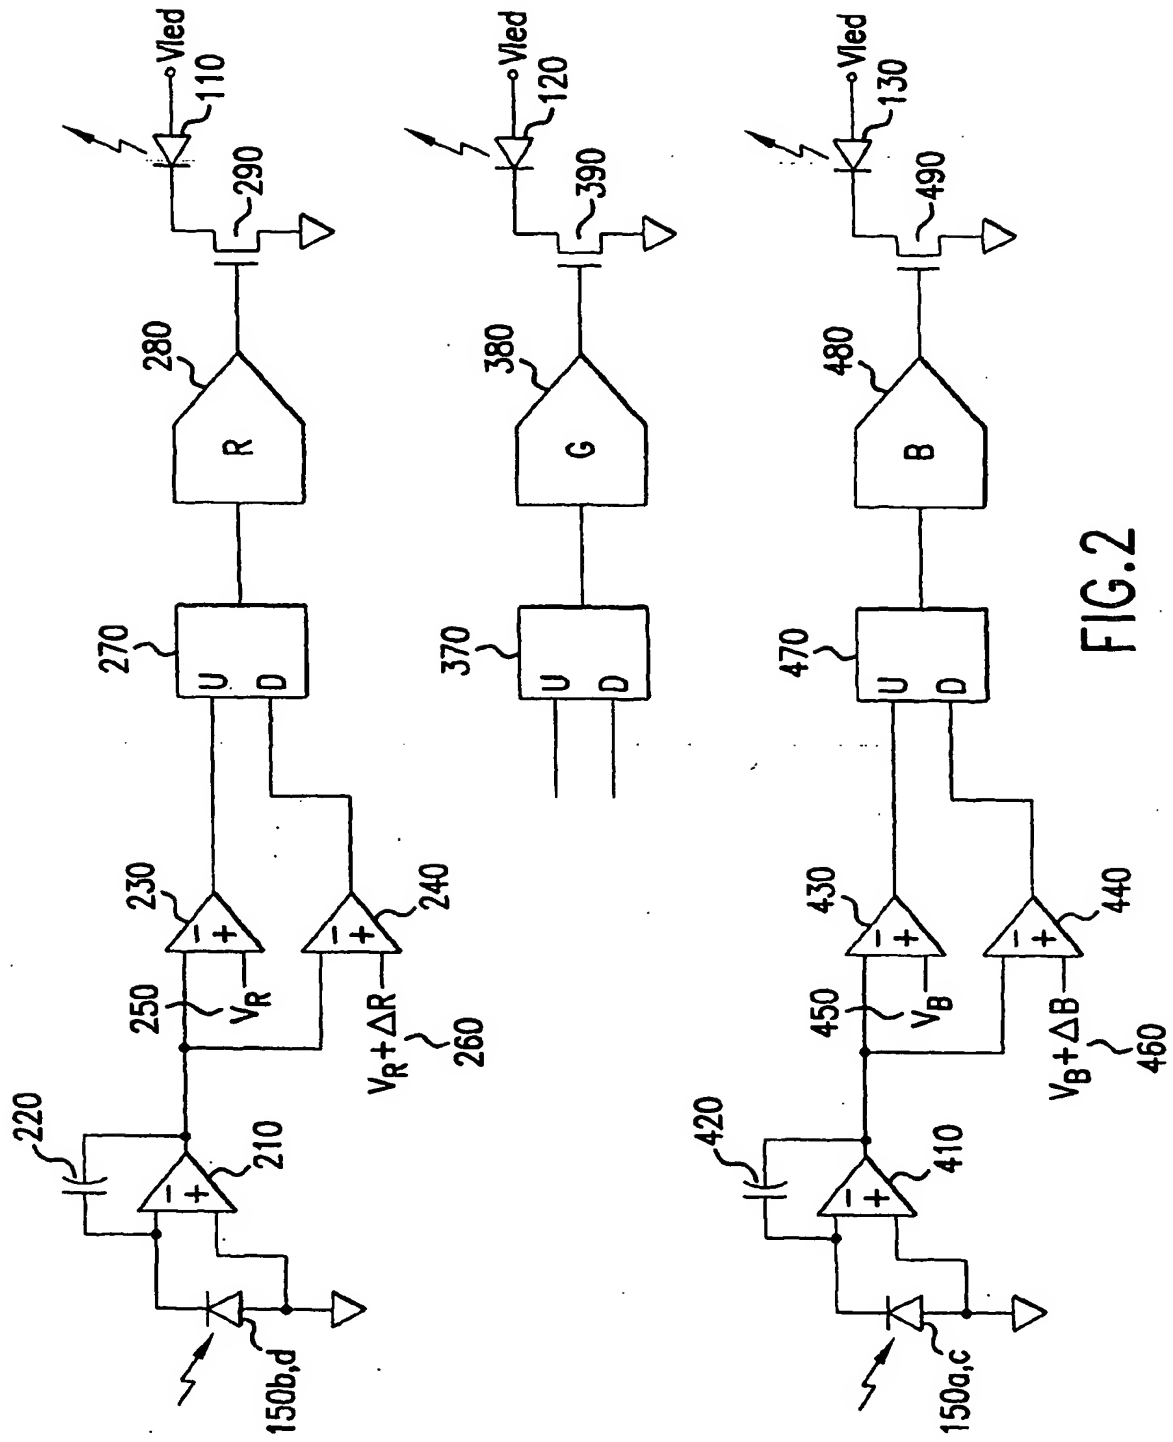


FIG. 2

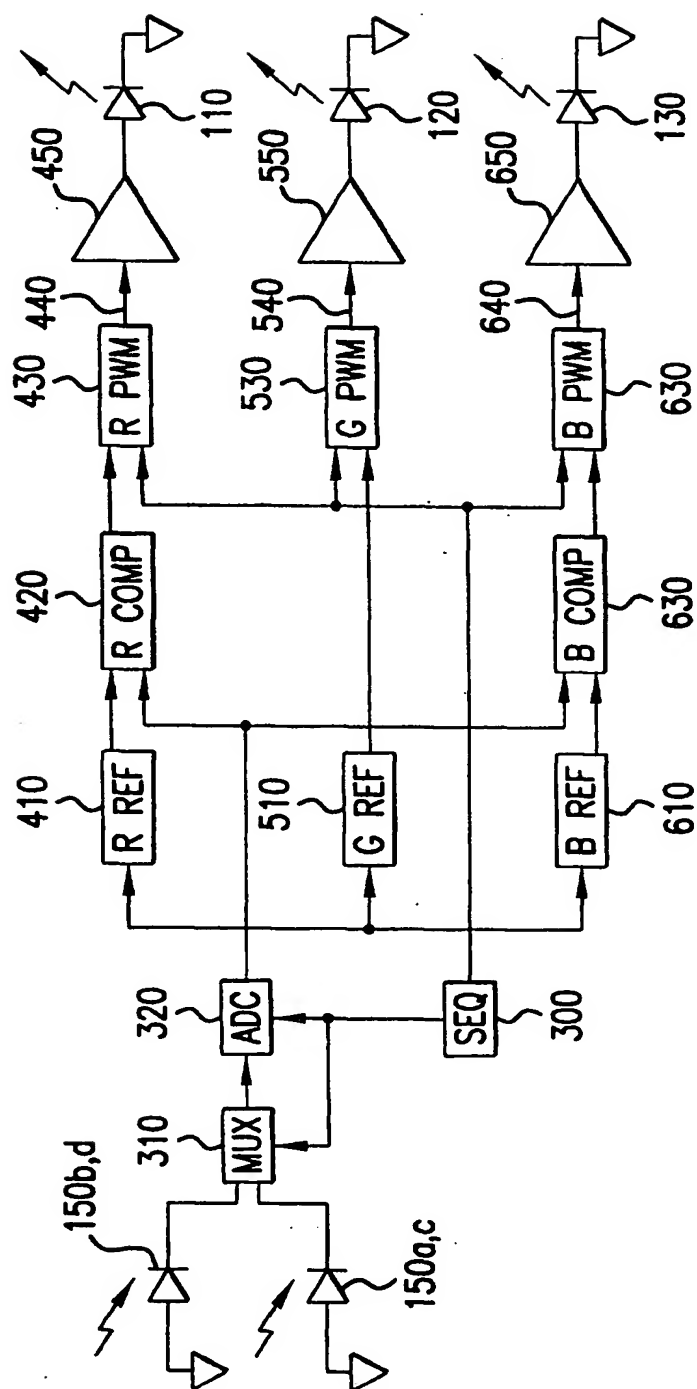


FIG.3


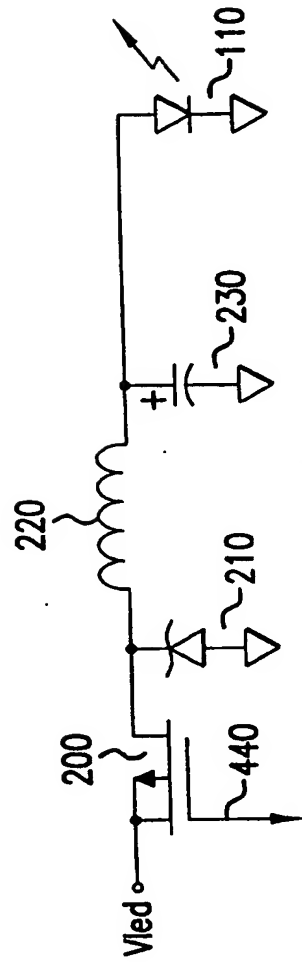


FIG. 4



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 152 642 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
29.10.2003 Bulletin 2003/44

(51) Int Cl.7: **H05B 33/08**

(43) Date of publication A2:
07.11.2001 Bulletin 2001/45

(21) Application number: **01109868.8**

(22) Date of filing: **23.04.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Nishimura, Ken A.**
Fremont, CA 94555-2964 (US)

(74) Representative: **Liesegang, Eva**
Forrester & Boehmert,
Pettenkoferstrasse 20-22
80336 München (DE)

(30) Priority: **27.04.2000 US 560718**

(71) Applicant: **Agilent Technologies, Inc. (a Delaware
corporation)**
Palo Alto, CA 94303 (US)

(54) **Method and apparatus for measuring spectral content of LED light source and control thereof**

(57) Solid state illumination using closed loop spectral control. Light emitting diodes producing different colors (110, 120, 130) are mounted in close proximity to

photosensors (150). Spectral content of the light emitting diodes is measured by the photosensors (150), and these measurements used to adjust light emitting diode currents to achieve the desired spectral characteristics.

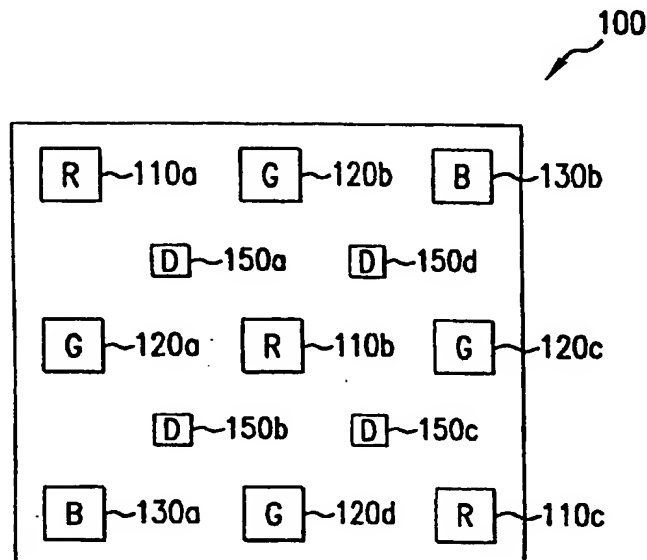


FIG. 1

EP 1 152 642 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 9868

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 99 31560 A (COLOR KINETICS INC) 24 June 1999 (1999-06-24) * page 15, line 22 - page 25, line 13; figures 1-9 * * page 72, line 18 - page 83, line 14; figures 71-83 *	1,3,5,6	H05B33/08
P,X	WO 00 37904 A (KONINKL PHILIPS ELECTRONICS NV) 29 June 2000 (2000-06-29) * page 1, line 1 - page 4, line 16; figures 1-4 *	1,6,7	
A	US 5 783 909 A (HOCHSTEIN PETER A) 21 July 1998 (1998-07-21) * column 2, line 58 - column 5, line 38; figure 1 *	1-3,5,7	
A	US 4 810 937 A (HAVER KAREL) 7 March 1989 (1989-03-07) * column 2, line 16 - column 5, line 54; figures 1-5 *	1,2,4	
A	US 4 029 991 A (SCHULTZ FREDERICK K) 14 June 1977 (1977-06-14) * abstract; figure 1 *	1,4	
A	US 4 529 949 A (WESSELING KAREL H ET AL) 16 July 1985 (1985-07-16)		
A	EP 0 786 714 A (KAMMERER GMBH M) 30 July 1997 (1997-07-30)		
A	US 5 912 568 A (KILEY DAVID A) 15 June 1999 (1999-06-15)		
A	US 6 016 038 A (LYS IHOR A ET AL) 18 January 2000 (2000-01-18)		
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		3 September 2003	Albertsson, E
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 9868

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-09-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9931560 A	24-06-1999	AU 1924199 A	05-07-1999
		CA 2314163 A1	24-06-1999
		EP 1040398 A2	04-10-2000
		US 2002171365 A1	21-11-2002
		US 2002171377 A1	21-11-2002
		US 2002153851 A1	24-10-2002
		US 2002130627 A1	19-09-2002
		US 2002171378 A1	21-11-2002
		WO 9931560 A2	24-06-1999
		US 2003057886 A1	27-03-2003
		US 2003011538 A1	16-01-2003
		US 6459919 B1	01-10-2002
		US 6292901 B1	18-09-2001
		US 2001028227 A1	11-10-2001
		US 6166496 A	26-12-2000
		US 6211626 B1	03-04-2001
		US 6528954 B1	04-03-2003
		US 2003100837 A1	29-05-2003
		US 2003076281 A1	24-04-2003
		US 6340868 B1	22-01-2002
		US 2002113555 A1	22-08-2002
		US 2002047646 A1	25-04-2002
		US 2002047628 A1	25-04-2002
		US 2002047569 A1	25-04-2002
		US 2002074559 A1	20-06-2002
		US 2002101200 A1	01-08-2002
		US 2002158583 A1	31-10-2002
		US 2002152045 A1	17-10-2002
		US 2002101197 A1	01-08-2002
		AU 5312999 A	17-01-2000
		CA 2336184 A1	06-01-2000
		EP 1090459 A2	11-04-2001
		JP 2002519989 T	02-07-2002
		WO 0001067 A2	06-01-2000
		AT 222013 T	15-08-2002
		AU 757000 B2	30-01-2003
		AU 9206098 A	16-03-1999
		CA 2302227 A1	04-03-1999
		DE 69807092 D1	12-09-2002
		DE 69807092 T2	08-05-2003
		EP 1016062 A1	05-07-2000
		JP 2001514432 T	11-09-2001
WO 0037904 A	29-06-2000	US 6127783 A	03-10-2000
		CN 1114095 B	09-07-2003
		DE 69906260 D1	30-04-2003

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 9868

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0037904	A		WO 0037904 A1	29-06-2000
			EP 1056993 A1	06-12-2000
			JP 2002533870 T	08-10-2002
			US 6445139 B1	03-09-2002
			US 6495964 B1	17-12-2002
US 5783909	A	21-07-1998	WO 9956303 A1	04-11-1999
			CA 2328439 A1	04-11-1999
			EP 1075706 A1	14-02-2001
US 4810937	A	07-03-1989	CA 1265575 A1	06-02-1990
			US 4797651 A	10-01-1989
			US 4754202 A	28-06-1988
			US 4686425 A	11-08-1987
US 4029991	A	14-06-1977	CA 1063667 A1	02-10-1979
US 4529949	A	16-07-1985	NL 8200517 A	01-09-1983
			AT 27527 T	15-06-1987
			AU 553384 B2	10-07-1986
			AU 1129883 A	18-08-1983
			CA 1194937 A1	08-10-1985
			DE 3371850 D1	02-07-1987
			DK 57983 A ,B,	12-08-1983
			EP 0086528 A1	24-08-1983
			ES 8401254 A1	16-02-1984
			JP 1745380 C	25-03-1993
			JP 4034836 B	09-06-1992
			JP 58151075 A	08-09-1983
			ZA 8300937 A	30-11-1983
EP 0786714	A	30-07-1997	DE 19602891 A1	07-08-1997
			DE 59609885 D1	02-01-2003
			EP 0786714 A2	30-07-1997
US 5912568	A	15-06-1999	NONE	
US 6016038	A	18-01-2000	AT 222013 T	15-08-2002
			AU 757000 B2	30-01-2003
			AU 9206098 A	16-03-1999
			CA 2302227 A1	04-03-1999
			DE 69807092 D1	12-09-2002
			DE 69807092 T2	08-05-2003
			EP 1195740 A2	10-04-2002
			EP 1016062 A1	05-07-2000
			ES 2182358 T3	01-03-2003

EPO FORM P455

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO. .**

EP 01 10 9868

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-09-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6016038 A		JP 2001514432 T	11-09-2001
		US 2002171365 A1	21-11-2002
		US 2002171377 A1	21-11-2002
		US 2002163316 A1	07-11-2002
		US 2002153851 A1	24-10-2002
		US 2002130627 A1	19-09-2002
		US 2002171378 A1	21-11-2002
		WO 9910867 A1	04-03-1999
		US 2003057886 A1	27-03-2003
		US 2003011538 A1	16-01-2003
		US 2003057887 A1	27-03-2003
		US 2003057890 A1	27-03-2003
		US 6459919 B1	01-10-2002
		US 6292901 B1	18-09-2001
		US 2001028227 A1	11-10-2001
		US 6211626 B1	03-04-2001
		US 6528954 B1	04-03-2003
		US 2003137258 A1	24-07-2003
		US 2003100837 A1	29-05-2003
		US 2003076281 A1	24-04-2003
		US 6150774 A	21-11-2000
		US 6340868 B1	22-01-2002
		US 6548967 B1	15-04-2003
		US 2002113555 A1	22-08-2002
		US 2002047646 A1	25-04-2002
		US 2002047628 A1	25-04-2002
		US 2002047569 A1	25-04-2002
		US 2002074559 A1	20-06-2002
		US 2002057061 A1	16-05-2002
		US 2002158583 A1	31-10-2002
		US 2002152045 A1	17-10-2002
		US 2002101197 A1	01-08-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82